

## GRUPPO INCASSO PLUS

### Version

Plus - Built-in 105 cm - White -  
800 m<sup>3</sup>/h

### Collection

Design

### EAN code

8034122367149



*The photograph is purely for information  
It may not correspond to the selected version.*

## FEATURES

**Perimeter suction**  
**Electronic control**  
**Metallic grease filter, removable and washable**  
**Optional charcoal filter**  
**Optional remote control**  
**Dimmable led lighting**  
**Dynamic LED Light (2700K - 5600K)**  
**Dialogue system with auto mode**

## OPTIONAL ACCESSORIES

**KACL.770#41F**  
Remote under-roof 1100 m<sup>3</sup>/h  
Brushless

**KACL.782#49F**  
Slim motor 800 m<sup>3</sup>/h

**KACL.786#41F**  
Outdoor extractor fan 1000 m<sup>3</sup>/h

**KACL.796#4AF**  
Outdoor extractor fan 1500 m<sup>3</sup>/h

**KACL.797#4AF**  
Remote under-roof motor 1300 m<sup>3</sup>/h

**KACL.798#41F**  
Remote under-roof motor 950 m<sup>3</sup>/h

**103050091**  
Round charcoal filter Ø170 mm - Type 6

**105080053**  
Remote control

## TECHNICAL FEATURES

**Installation type**  
Built-in

**Dimensions**  
105 cm

**Finishing**  
Painted white steel

**Motor**  
800 m<sup>3</sup>/h

**Type of control**  
Electronic control

**Speed settings**  
4

**Lighting**  
Led 2x3 W - 2700 K / 5600 K

**Minimum distance**  
Gas hob: 62 cm  
Electric hob: 52 cm

## PACKAGING:WEIGHTS AND VOLUMES

**Gross weight**  
18 kg

**Net weight**  
15 kg

**Volumes**  
0.16 m<sup>3</sup>

**Packaging size**

Length	1185 mm
Height	345 mm
Depth	385 mm


## CONSUMPTION AND CONNECTION FEATURES

**Maximum consumption**  
280 W

**Voltage**  
220-240V

**Frequency**  
50-60Hz

**ENERGY CLASS**  
A



## GRUPPO INCASSO PLUS

### Version

Plus - Built-in 105 cm - White -  
800 m<sup>3</sup>/h


### Collection

Design

### EAN code

8034122367149

## ENERGY LABEL

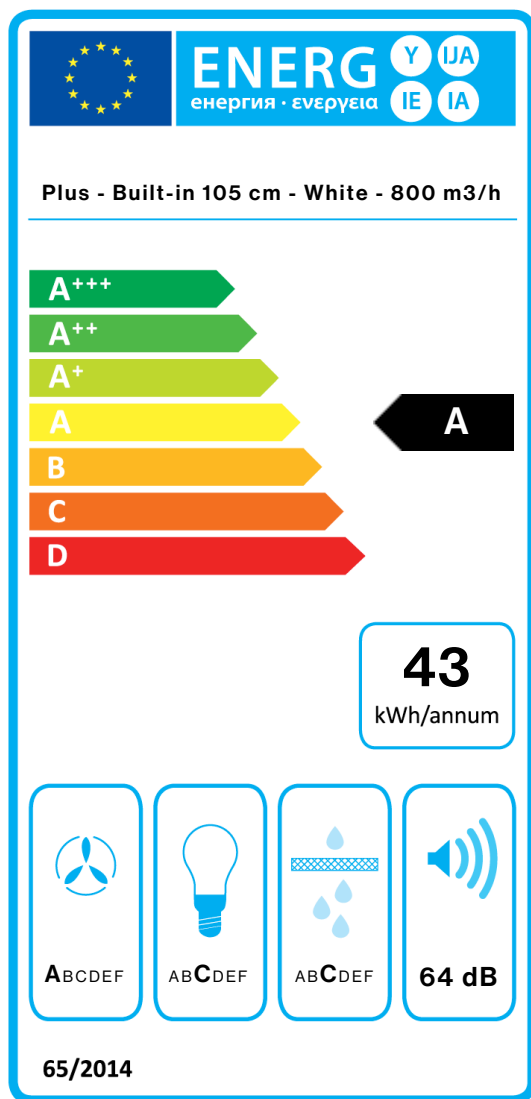

PF		
S	Falmec Spa	
M	Plus - Built-in 105 cm - White - 800 m <sup>3</sup> /h	
AEC	43,4	kWh/a
EEC	A	
FDE	32,8	
FDEC	A	
LE	16,7	
LEC	C	
GFE	80,0	
GFEC	C	
Qmin	304,0	m <sup>3</sup> /h
Qmax	575,0	m <sup>3</sup> /h
Qboost	697,0	m <sup>3</sup> /h
SPEmin	51	dBa
SPEmax	64	dBa
SPEboost	69	dBa
PO	-	W
PS	0,28	W
PI		
F	0.8	
EEL	47,1	
Qbep	417,0	m <sup>3</sup> /h
Pbep	379	Pa
Qboost	697,0	m <sup>3</sup> /h
Wbep	134,0	W
WL	5,80	W
Emiddle	97	lux
Lwa-SPEmax	64	dBa

**PF\_Product fiche according to 65/2014** S\_Supplier name / M\_Model identification / AEC\_Annual Energy Consumption (AEC hood) / EEC\_Energy Efficiency class / FDE\_Fluid Dynamic Efficiency (FDE hood) / FDEC\_Fluid Dynamic Efficiency class / LE\_Lighting Efficiency (LE hood) / LEC\_Lighting Efficiency class / GFE\_Grease Filtering Efficiency / GFEC\_Grease Filtering Efficiency class / Qmin\_Air flow (in m<sup>3</sup>/h) at min speed in normal use / Qmax\_Air flow (in m<sup>3</sup>/h) at max speed in normal use / Qboost\_Air flow (in m<sup>3</sup>/h) at intensive or boost setting (max air-flow) / SPEmin\_Airborne acoustical A-weighted sound power emissions at min speed in normal use / SPEmax\_Airborne acoustical A-weighted sound power emissions at max speed in normal use / SPEboost\_Airborne acoustical A-weighted sound power emissions (in dB) at intensive or boost setting / PO\_Power consumption in off mode (Po) / Ps\_Power consumption in stand by mode (Ps). **PI\_Additional information according to 66/2014** F\_Time increase factor / EEL\_Energy Efficiency Index / Qbep\_Measured air flow rate at best efficiency point / Pbep\_Measured air pressure at best efficiency point / Qboost\_Maximum air flow / Wbep\_Measured electric power input at best efficiency point / WL\_Nominal power of the lighting system / Emiddle\_Average illumination of the lighting system on the cooking surface / Lwa-SPEmax\_Sound pressure level at the highest speed.