

EUROPA 175 BLACK

Version

Island 175 cm - Black - 800 m³/h

Designer

Collection

Design

EAN code

8034122365688

FEATURES

Perimeter suction
 Electronic control
 Optional combined regenerable Carbon.Zeo filter
 Optional charcoal filter
 Optional remote control
 Dimmable led lighting
 Dynamic LED Light (2700K - 5600K)
 Dialogue system with auto mode

OPTIONAL ACCESSORIES

KACL.557#N

Extension h120 cm Island - Black

KACL.961

Charcoal and Zeolite filter

105080053

Remote control

TECHNICAL FEATURES

Installation type

Island

Dimensions

175 cm

Finishing

Black matte

Motor

800 m³/h

Type of control

Electronic control

Speed settings

4

Lighting

Led 4x1,2 W - 2700 K / 5600 K

Minimum distance

Gas hob: 63 cm

Electric hob: 52 cm



*The photograph is purely for information
 It may not correspond to the selected version.*

PACKAGING:WEIGHTS AND VOLUMES

Gross weight

78.9 kg

Net weight

67 kg

Volumes

0.71 m³

Packaging size

Length

1905 mm

Height

515 mm

Depth

725 mm

CONSUMPTION AND CONNECTION FEATURES

Maximum consumption

280 W

Voltage

220-240V

Frequency

50-60Hz

Plug type

Shuko

MOTOR TECHNICAL SHEET

Maximum capacity

680 m³/h

I.E.C. 61591

Maximum noise level

68 dB(A)re1pW

I.E.C.60704-2-13

Maximum pressure (Pa)


500 Pa

Max. motor power

215 W

ENERGY CLASS

B



EUROPA 175 BLACK

Version

Island 175 cm - Black - 800
m³/h

Designer

Collection

Design


EAN code

8034122365688

MOTOR TECHNICAL SHEET

Motor speed	1	2	3	4
Noise level dB(A) _{re1pW-I.E.C.60704-2-13}	49	56	62	68
Capacity (m ³ /h) I.E.C.61591	280	370	480	680
Maximum pressure (Pa)	390	420	480	500
Motor Power (W)	132	153	175	215
Air outlet	150	150	150	150

CAPACITY / PRESSURE

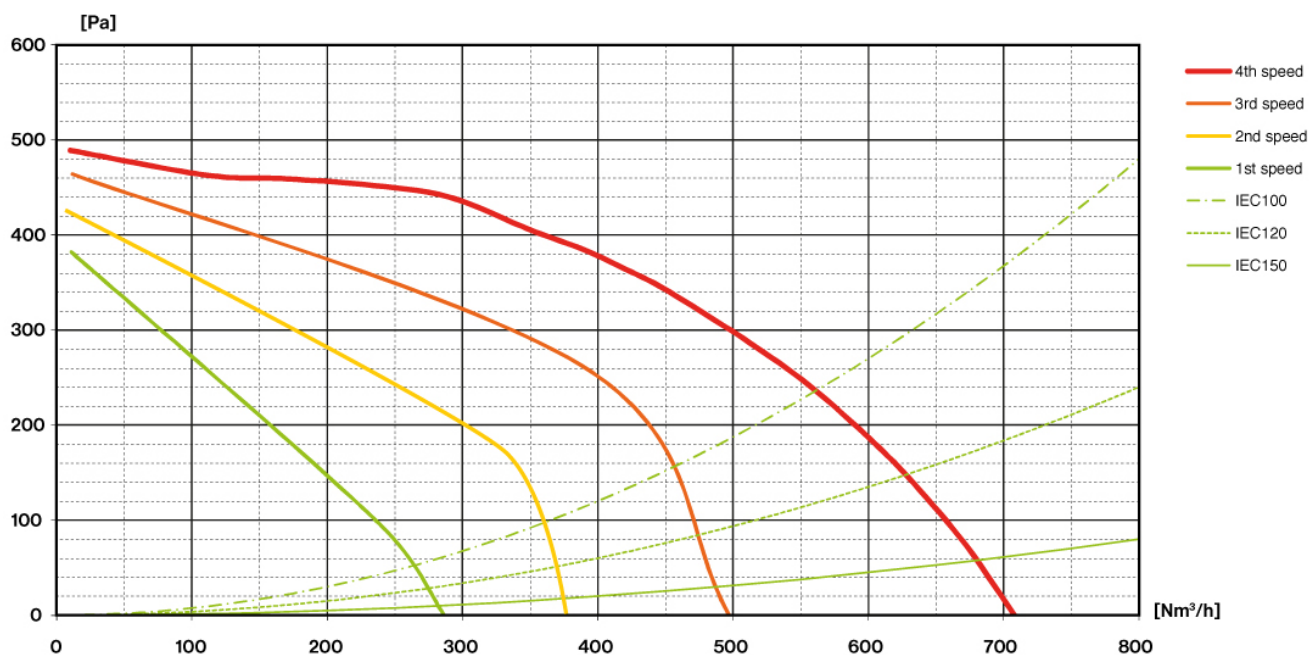

EUROPA 175 BLACK

Version

Island 175 cm - Black - 800 m3/h

Designer


Collection

Design

EAN code

8034122365688

ENERGY LABEL

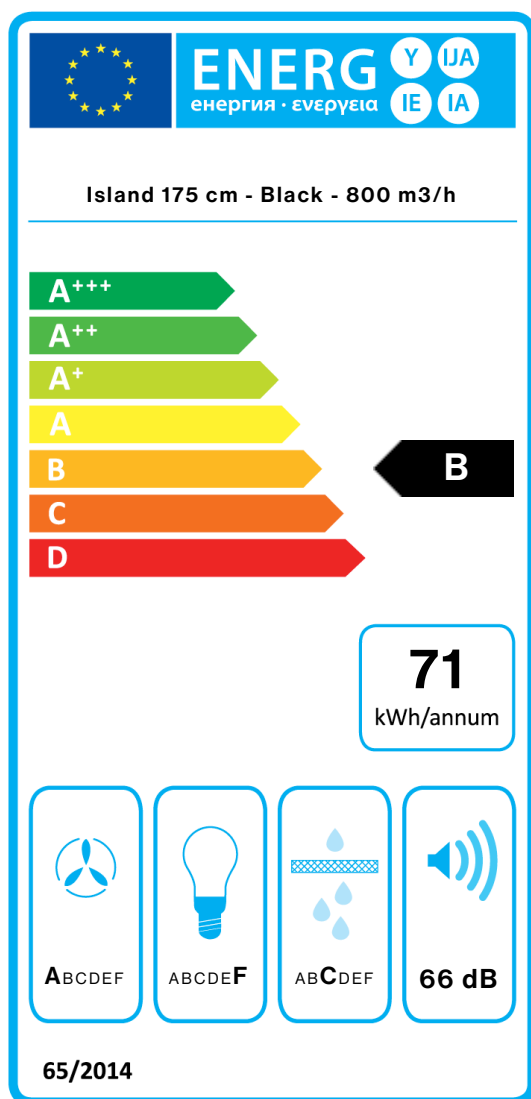

PF		
S	Falmec Spa	
M	Island 175 cm - Black - 800 m3/h	
AEC	71,2	kWh/a
EEC	B	
FDE	29,2	
FDEC	A	
LE	7,3	
LEC	F	
GFE	80,0	
GFEC	C	
Qmin	313,0	m ³ /h
Qmax	573,0	m ³ /h
Qboost	641,0	m ³ /h
SPEmin	51	dBa
SPEmax	66	dBa
SPEboost	69	dBa
PO	-	W
PS	0,48	W
PI		
F	0.9	
EEL	65,7	
Qbep	366,0	m ³ /h
Pbep	373	Pa
Qboost	641,0	m ³ /h
Wbep	130,0	W
WL	39,00	W
Emiddle	285	lux
Lwa-SPEmax	66	dBa

PF_Product fiche according to 65/2014 S_Supplier name / M_Model identification / AEC_Annual Energy Consumption (AEC hood) / EEC_Energy Efficiency class / FDE_Fluid Dynamic Efficiency (FDE hood) / FDEC_Fluid Dynamic Efficiency class / LE_Lighting Efficiency (LE hood) / LEC_Lighting Efficiency class / GFE_Grease Filtering Efficiency / GFEC_Grease Filtering Efficiency class / Qmin_Air flow (in m³/h) at min speed in normal use / Qmax_Air flow (in m³/h) at max speed in normal use / Qboost_Air flow (in m³/h) at intensive or boost setting (max air-flow) / SPEmin_Airborne acoustical A-weighted sound power emissions at min speed in normal use / SPEmax_Airborne acoustical A-weighted sound power emissions at max speed in normal use / SPEboost_Airborne acoustical A-weighted sound power emissions (in dB) at intensive or boost setting / PO_Power consumption in off mode (Po) / Ps_Power consumption in stand by mode (Ps). **PI_Additional information according to 66/2014** F_Time increase factor / EEI_Energy Efficiency Index / Qbep_Measured air flow rate at best efficiency point / Pbep_Measured air pressure at best efficiency point / Wbep_Measured electric power input at best efficiency point / WL_Nominal power of the lighting system / Emiddle_Average illumination of the lighting system on the cooking surface / Lwa-SPEmax_Sound pressure level at the highest speed.